

# IFT 120



## FROZEN TOUCH




### Self-contained ice maker up to 60 kg - Paddle system

#### ● Position n°



#### ● Available dice size



#### ● Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●

#### ● Features & Plus

- Hollow cube 20 gr
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

#### ● Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	60
21° C	15° C	50
32° C	21° C	41

### 2 Years Warranty

subject to limitations

#### ● Certifications available for this model



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B tel. +39 0331 436217  
20020 Villa Cortese (MI), Italy fax +39 0331 436218

www.ntfice.it  
info@ntfice.it



ntfice.it




# IFT 120



## FROZEN TOUCH



### Self-contained ice maker up to 60 kg - Paddle system

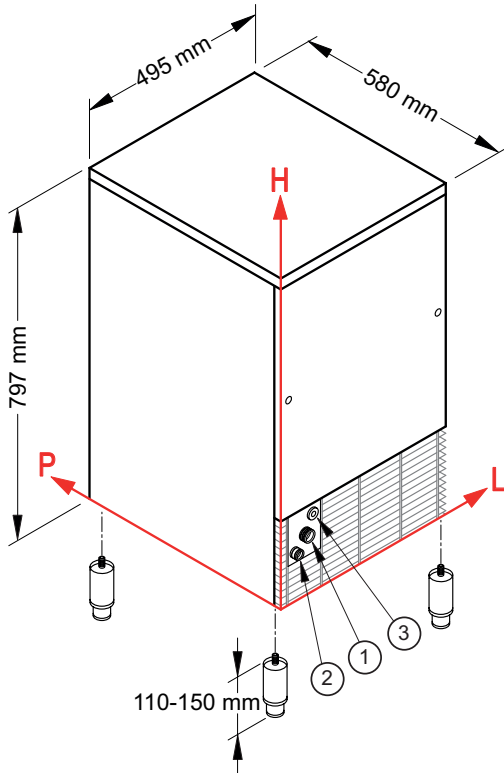

#### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
111 mm - 196 mm - 3/4"
- ② Water outlet:  
49 mm - 151 mm - 24 mm
- ③ Electrical connection:  
156 mm - 232 mm

#### • Working conditions






- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### • Technical information

Production in 24h	50 kg
Store capacity, up to	20 kg
Cooling system	A - W
Kind of cube	20 g
Refrigerant	R404A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	420 W
Fuse	10 A
Water consumption	A: 3,3 l/kg W: 10,5 l/kg
Sizes (L-P-H mm)	495 - 580 - 797
Sizes with pack (L-P-H mm)	550 - 630 - 990
Net weight	54 kg
Gross weight	62 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

				
Sizes without feet	Standard Cube (20 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice  
Rev. 00 - Issued September 2016



**N.T.F. S.r.l. Nuove Tecnologie del Freddo**

Via dell'Industria 10/B tel. +39 0331 436217  
20020 Villa Cortese (MI), Italy fax +39 0331 436218

[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it

